

# PRODUCT DATA SHEET



2024-02-02

Article number:

## 4107655411SSS


Braked castor 75 mm, total stop brake, TPU-tyre

Swivel bracket with total stop brake. Made of zinc-chromatized pressed sheet metal with double ball race swivel. Top plate fitting. Black lacquered. Riveted wheel axle. Wheel with black TPU-tyre. Hub made of black PP with threadguards. Plain bearing.



Image may differ from the actual product.\*

### DIMENSIONS

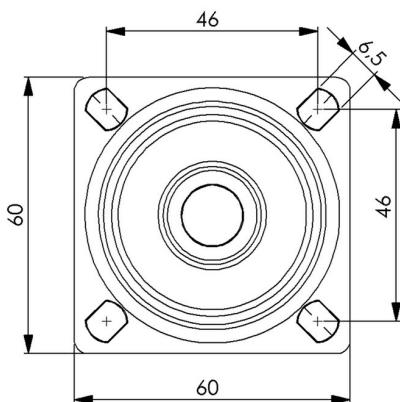

### SPECIFICATIONS

|                            |                      |
|----------------------------|----------------------|
| Diameter                   | 75 mm                |
| Totalt height              | 99 mm                |
| Load Capacity (dynamic)    | 55 kg                |
| Castor model               | Brake                |
| Fitting                    | Top plate            |
| Material Tread             | Polyurethane         |
| Bearing                    | Plain bearing        |
| Thread hardness (Shore°)   | 98° Shore A          |
| Brake                      | Total brake          |
| Width of tread             | 24 mm                |
| Material Hub               | Polypropylen (pp)    |
| Wheel Pattern              | EN 12530             |
| Painted Housing            | Black                |
| Color Tread                | Black                |
| Material Type              | RoHS (EU) - Approved |
| Teststandard               | EN 12530             |
| Offset                     | 35 mm                |
| Material Thickness Bracket | 2 mm                 |
| Swivel radius              | 82 mm                |
| Product Weight             | 0.33 kg              |
| Temperature Range          | -20°C to +50°C       |

*Numeric values in the technical specification can be nominal/rounded to the nearest standard dimension. To see exact values, please use the drawing.*