

# PRODUCT DATA SHEET

2024-02-12



Article number:

5812665933GS


Braked castor 125 mm, total stop brake, elastic rubber-tyre

Swivel bracket with total stop brake. Made of zinc-chromatized pressed sheet metal with double ball race swivel. Top plate fitting. Wheel axle with nut. Wheel with grey elastic rubber-tyre. Hub made of black Nylon/PA6 with threadguards. Ball bearing.



Image may differ from the actual product.\*

## DIMENSIONS

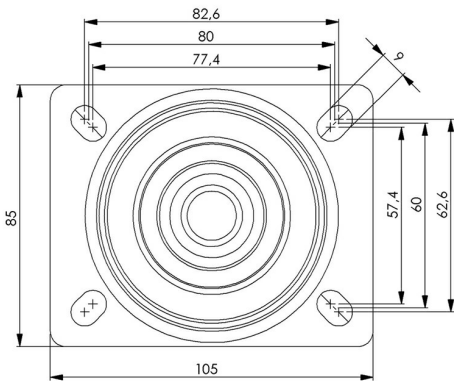

## SPECIFICATIONS

|                            |                      |
|----------------------------|----------------------|
| Diameter                   | 125 mm               |
| Totalt height              | 157 mm               |
| Load Capacity (dynamic)    | 225 kg               |
| Castor model               | Brake                |
| Fitting                    | Top plate            |
| Material Tread             | Elastic Rubber       |
| Bearing                    | Ball bearing         |
| Plate Size                 | 105x85 mm            |
| CC Distance                | 80x60 mm             |
| Thread hardness (Shore°)   | 75° Shore A          |
| Brake                      | Total brake          |
| Width of tread             | 36 mm                |
| Material Hub               | Nylon PA6            |
| Top Hole                   | 12,5x9 mm            |
| Color Tread                | Grey                 |
| Material Type              | RoHS (EU) - Approved |
| Teststandard               | EN 12532             |
| Offset                     | 41 mm                |
| Material Thickness Bracket | 2,5 mm               |
| Materialthickplate         | 3 mm                 |
| Swivel radius              | 129 mm               |
| Product Weight             | 1,22 kg              |
| Temperature Range          | -30°C to +70°C       |

Numeric values in the technical specification can be nominal/rounded to the nearest standard dimension. To see exact values, please use the drawing.